



Analytical Analysis of Capacitive Pressure Sensor with Clamped Diaphragm

M. Shahiri Tabarestani^a, B. Azizollah Ganji *^b

^a Department of Electrical Engineering, Islamic Azad University, Central Tehran Branch, Tehran, Iran

^b Electrical Engineering Department, Babol University of Technology, Babol, Iran

PAPER INFO

Paper history:

Received 24 May 2012

Received in revised form 23 July 2012

Accepted 15 November 2012

Keywords:

Capacitance

Deflection

Capacitive Pressure Sensor

Diaphragm Deflection

ABSTRACT

In this paper, analytical analysis of capacitive pressure sensor with clamped diaphragm is presented. Mechanical and electrical properties of the sensor are theoretically analyzed based on theory of thin plates with small deflection and the results are evaluated using finite element analysis. The central deflection and capacitance values under uniform external pressure are calculated. Comparison of theoretical results shows good agreement with finite element analysis. The results indicate that the mathematical model has a high accuracy to determine the sensor behaviors.

doi: 10.5829/idosi.ije.2013.26.03c.09

1. INTRODUCTION

Capacitive micro machined pressure sensors have been designed for different kinds of applications because of high pressure sensitivity, low power consumption, and good stability compared to piezoresistive structures [1-3]. Generally, Micro-electromechanical system (MEMS) capacitive pressure sensor consists of a thin, flexible conductive membrane (diaphragm) as one of the electrodes that is separated from a fixed back plate by a small air gap. Due to an applied pressure, the displacement of the diaphragm is dependent on diaphragm's shape. There are two shapes of diaphragms (square and round) which are commonly applied in MEMS devices. In capacitive sensors, a thin diaphragm is used as a pressure sensing element [2-4]. When the diaphragm is exposed to an external uniform pressure, P , the diaphragm deflects cause a decrease in the air gap that results an increase in capacitance between the diaphragm and the fixed back plate. So, deflection of the movable part due to applied pressure is sensed and translated into an electrical capacitance change [1].

The sensitivity of the capacitive sensors largely depends on the capacitance change, so exact calculation of the capacitance between the deformed diaphragm and the back plate is necessary. Parallel plate capacitor is the

basic and simplest form of capacitor. When one of the electrodes is deflected due to an external pressure, a parallel plate equation will introduce significant error. So, differential elements of parallel capacitance combined together to generate the total capacitance. Thus, it can be concluded that exact calculation of the capacitance depends on the physical position of all nodes on the diaphragm. Understanding of capacitance changes in the structure requires more knowledge about mechanical deflection of an upper electrode. The behaviors of the flat clamped diaphragms are investigated using the classical Timoshenko plate theory [5, 6]. Many researchers have developed small and large deflection analysis for constant thickness plates [7].

In this paper, analytical analysis of capacitive pressure sensor with clamped diaphragm is presented. Furthermore, the mechanical deflection and capacitance changes of a capacitive pressure sensor are evaluated. Bending mechanics of rectangular thin plates with small deflection and with proper boundary conditions are calculated using mathematical software. To evaluate the analytical results, finite element analysis is used and compared with the analytical results. The paper is organized as follows; in section 2, the problem is illustrated using related equations. Finite element analysis of the pressure sensor is described in section 3. The analytical and simulation results are summarized in section 4. Finally, section 5 concludes the paper.

*Corresponding Author Email: baganji@nit.ac.ir (B. Azizollah Ganji)

2. PROBLEM ILLUSTRATION

In pressure sensors, pressure is specified by the diaphragm deflection due to applied pressure. Figure 1 illustrates top and cross-section view of the typical pressure sensor diaphragm. The diaphragm side length and thickness are a and h , respectively. w_c denotes the center deflection and $w(x, y)$ is the deflection of the diaphragm. When the external pressure applied to the diaphragm, the diaphragm deflects. As the pressure is pulled back, the diaphragm returns to its original place. The boundary conditions of the clamped edges can be expressed mathematically as [6]:

$$\begin{aligned} w(x = \pm a, \forall y) &= 0, \\ w(y = \pm b, \forall x) &= 0, \\ \frac{dw}{dx}(x = \pm a, \forall y) &= 0, \\ \frac{dw}{dy}(y = \pm b, \forall x) &= 0. \end{aligned} \quad (1)$$

The deflection, $w(x, y)$, caused by applying pressure to the uniform plate surface can be defined through the solution of this equation [6]:

$$\frac{\partial^4 w(x, y)}{\partial x^4} + 2 \frac{\partial^4 w(x, y)}{\partial x^2 \partial y^2} + \frac{\partial^4 w}{\partial y^4} = \frac{P(x, y)}{D} \quad (2)$$

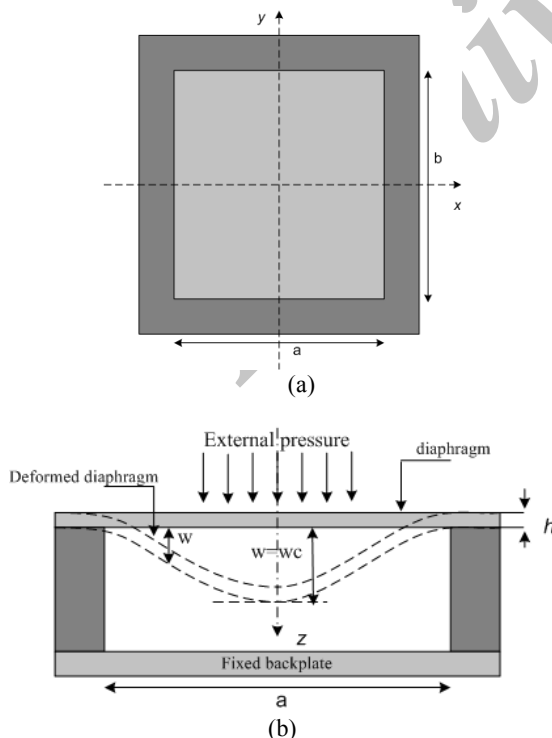


Figure 1. Top and cross section view of typical pressure sensor Diaphragm

where, $P(x, y)$ is the applied pressure on the plate, and D is called the flexural rigidity of the plate which is defined as:

$$D = \frac{Eh^3}{12(1-\nu^2)} \quad (3)$$

where, E is the modulus of elasticity of the material or the Young's modulus, ν is Poisson's ratio and h is the thickness of the diaphragm. From [6] by applying clamped boundary conditions, the deflection $w(x, y)$, caused by applying pressure would be the sum of two components:

$$w = w_1 + w_2 \quad (4)$$

Where, w_1 is the deflection of the simply supported plate under uniform applied pressure and w_2 is representing the effect of clamped boundary conditions in the shape of a distributed moment along the simply supported edges [6].

$$\begin{aligned} w_1 = & \frac{4Pa^4}{\pi^5 D} \sum_{m=1,3,5,\dots}^{\infty} \frac{(-1)^{(m-1)/2}}{m^5} \left(1 - \frac{\alpha_m \tanh \alpha_m + 2}{2 \cosh \alpha_m} \cosh \frac{m\pi y}{a} \right. \\ & \left. + \frac{1}{2 \cosh \alpha_m} \frac{m\pi y}{a} \sinh \frac{m\pi y}{a} \right) \cos \frac{m\pi x}{a} \end{aligned} \quad (5)$$

And

$$\begin{aligned} w_2 = & \frac{-a^2}{2\pi^2 D} \sum_{m=1,3,\dots}^{\infty} E_m \frac{(-1)^{(m-1)/2} \cos \frac{m\pi x}{a}}{m^2 \cosh \alpha_m} \\ & \left(\frac{m\pi y}{a} \sinh \frac{m\pi y}{a} - \alpha_m \tanh \alpha_m \cosh \frac{m\pi y}{a} \right) - \\ & \frac{b^2}{2\pi^2 D} \sum_{m=1,3,\dots}^{\infty} F_m \frac{(-1)^{(m-1)/2} \cos \frac{m\pi y}{b}}{m^2 \cosh \beta_m} \\ & \left(\frac{m\pi x}{b} \sinh \frac{m\pi x}{b} - \beta_m \tanh \beta_m \cosh \frac{m\pi x}{b} \right) \end{aligned} \quad (6)$$

where,

$$\alpha_m = \frac{m\pi b}{2a} \quad (7)$$

And

$$\beta_m = \frac{m\pi a}{2b} \quad (8)$$

where, a, b are the dimensions of the sensor diaphragm. For calculating the constants E_m and F_m , boundary conditions for the edges $y = \pm b/2, x = \pm a/2$ are applied [6]:

$$\left(\frac{\partial w}{\partial y}\right)_{y=\pm b/2} = \left(\frac{\partial w_1}{\partial y}\right)_{y=\pm b/2} + \left(\frac{\partial w_2}{\partial y}\right)_{y=\pm b/2} = 0 \quad (9)$$

And

$$\left(\frac{\partial w}{\partial x}\right)_{x=\pm a/2} = \left(\frac{\partial w_1}{\partial x}\right)_{x=\pm a/2} + \left(\frac{\partial w_2}{\partial x}\right)_{x=\pm a/2} = 0 \quad (10)$$

By applying the above boundary conditions, we obtain a system for calculating the coefficients E_i and F_i as follows [6]:

$$\begin{aligned} & \frac{4Pa^2}{\pi^3 i^4} \left(\frac{\alpha_i}{\cosh^2 \alpha_i} - \tanh \alpha_i \right) - \frac{E_i}{i} \left(\tanh \alpha_i + \frac{\alpha_i}{\cosh^2 \alpha_i} \right) \\ & - \frac{8ia}{\pi b} \sum_{m=1,3,\dots}^{\infty} \frac{F_m}{m^3} \frac{1}{\left(\frac{a^2}{b^2} + \frac{i^2}{m^2} \right)^2} = 0 \end{aligned} \quad (11)$$

where,

$$\alpha_i = \frac{i\pi b}{2a} \quad (12)$$

A similar equation is obtained from Equation (10). The constants $E_1, E_3, \dots, F_1, F_3, \dots$ can be determined from these two equations by method of successive approximations [6]. The capacitance between two parallel electrodes can be expressed as

$$C = \epsilon_0 \epsilon_r \frac{A}{d} \quad (13)$$

where, $\epsilon_0, \epsilon_r, A$ and d are permittivity of free space ($8.854 \times 10^{-14} \text{ F/cm}$), relative dielectric constant of material between the plates (which is unity for air), effective electrode area and gap between the plates, respectively. From this relationship, increasing or decreasing the spacing between the two plates would result in a change in capacitance. The following equation will determine the capacitance changes in a parallel plate capacitor when the electrode is deflected due to an external force [5].

$$C = \iint_A \frac{\epsilon_0}{d - w(x, y)} \quad (14)$$

where, d is the gap height and $w(x, y)$ is the deflection of the diaphragm. For deflections which are small compared with h , the following equation will determine the small signal pressure sensitivity [8, 9].

$$S = \frac{\Delta C}{C_0 P} \quad (15)$$

where, ΔC is the capacitance change and P is related to uniform external pressure.

3. FINITE ELEMENT ANALYSIS (FEA) OF PRESSURE SENSOR

The structure of the sensor with clamped diaphragm consists of Pyrex glass back plate, p++si diaphragm, and the gold backplate electrode (see Figure 2). In our design, the thickness of the $0.55\text{mm} \times 0.55\text{mm}$ membrane is $4 \mu\text{m}$, and the height of the air gap is $1.5 \mu\text{m}$. The Young's modulus and Poisson's ratio of p++ silicon are assumed to be $160 \times 10^9 \text{ Pa}$ and 0.05 , respectively [10].

FEA software is used for simulating and analyzing the behaviors of MEMS capacitive biosensor to optimize the design and improve the performance of the device. The objectives of analysis are first, to verify the diaphragm displacement due to the mechanically applied pressure between the diaphragm and the back plate. Second, the deflection and capacitance between the diaphragm and the back plate was confirmed. The analysis options are nonlinear analysis, accuracy of convergence is calculated as $0.001 \mu\text{m}$, and a maximum mesh size of 2.4% is estimated for X-Y dimension.

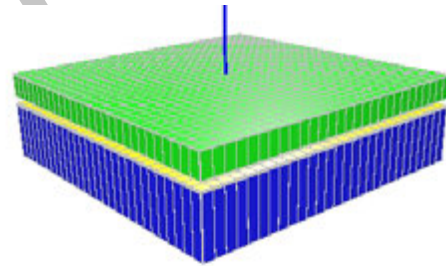


Figure 2. Structure of sensor with clamped diaphragm

4. RESULTS AND DISCUSSION

According to Equations (4-12), deflection of a plate with boundary conditions stated in Equation (1) can be calculated. The deformation in the Z axis of the diaphragm with a thickness of $4 \mu\text{m}$ at an applied pressure of 30mmHg (4 kPa) is investigated analytically and compared with simulation result. Figure 3 shows the analytically calculated deflection with maple software. As can be seen from Figure 3, maximum deflection is occurred at the central point of the plate that is $0.59 \mu\text{m}$.

Figure 4 shows the maximum central deflection of the clamped p++si diaphragm with FEA software. The result shows the maximum central deflection is $0.535 \mu\text{m}$ under same situation. As can be seen from the results, theoretical results shows good agreement with finite element analysis.

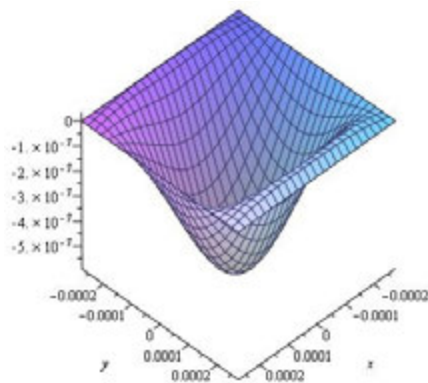


Figure 3. Deflection of a uniformly loaded square plate calculated with maple

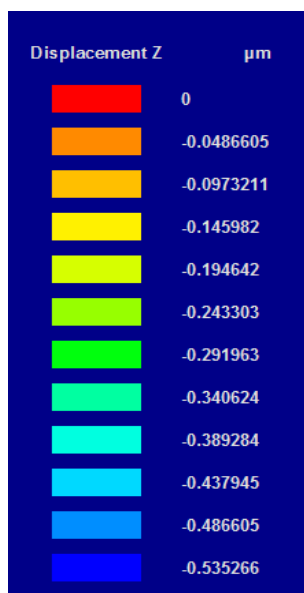
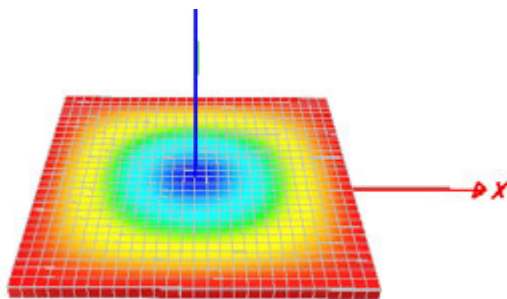


Figure 4. Diaphragm deformation on the Z axis of the clamped diaphragm

Figure 5 shows the calculated and simulated deflection- pressure curves of a square diaphragm. As can be seen from Figure 5, the central deflection is increased when the applied pressure is increased. From ($s_m = \frac{dw_c}{dP}$) the slope of the curves shows the

mechanical sensitivity of the diaphragm. According to Figure 5, the mechanical sensitivity of 1.3×10^{-10} m/Pa and 1.45×10^{-10} m/Pa have been achieved from simulated and analytical results respectively. It can be seen that the simulation curve is found to be very close to the theoretical curve.

Figure 6 shows the calculated and simulated relation between capacitance and pressure for clamped pressure sensor. From the calculated curve, it can be seen that the initial capacitance of clamped diaphragm is about 1.785 pF while the initial capacitance of simulated structure is 1.81 pF. As pressure applies from 0 mmHg to 60 mmHg, the total variation of capacitance are 0.87pF and 0.727pF for calculated and simulated curves, respectively. According to Figure 6, the results yield a sensitivity of 5.02×10^{-5} 1/Pa from simulated structure and 6.09×10^{-5} 1/Pa from analytical curve. It is clear from Figures 5 and 6 that in higher pressures (more than 40 mmHg) the difference between simulation and analytical results will be increased. This phenomenon happens because of approximation used for solving very complex mathematical equations of displacement and capacitance.

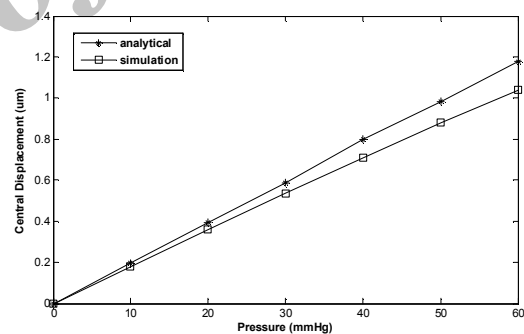


Figure 5. Central displacement versus pressure for the clamped pressure sensor

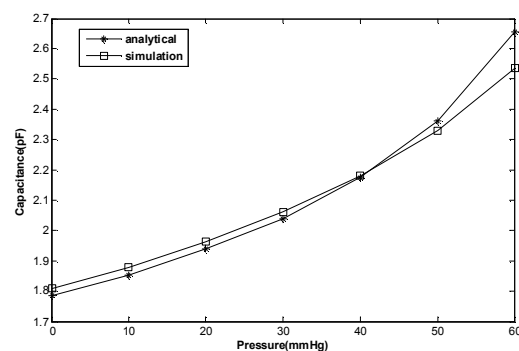


Figure 6. Capacitance versus pressure for the clamped pressure sensor

5. CONCLUSION

In this paper analytical analysis of capacitive pressure sensor with clamped diaphragm is presented and calculated with maple software. The central deflection and capacitance values under the influence of a uniform external pressure are calculated. Furthermore, the calculated results are compared with the simulation using FEA method. Analytical result yields a mechanical sensitivity of 1.45×10^{-10} m/Pa and FEA result yields a mechanical sensitivity of 1.3×10^{-10} m/Pa for sensor with clamped diaphragm. In addition, the results yield a sensor sensitivity of 5.02×10^{-5} 1/Pa from simulated structure and 6.09×10^{-5} 1/Pa from analytical curve. Comparison of the results shows good agreement between theoretical and simulation results. Analysis of structure behavior provides better realization to design high sensitivity pressure sensors.

6. REFERENCES

1. Zhou, M. X., Huang, Q. A., Qin, M. and Zhou, W., "A novel capacitive pressure sensor based on sandwich structures", *Microelectromechanical Systems, Journal of*, Vol. 14, No. 6, (2005), 1272-1282.
2. Zhang, Y., Howver, R., Gogoi, B. and Yazdi, N., "A high-sensitive ultra-thin MEMS capacitive pressure sensor", in Solid-State Sensors, Actuators and Microsystems Conference (TRANSDUCERS), 16th International, IEEE, (2011), 112-115.
3. Rahman, M. M. and Chowdhury, S., "Square Diaphragm CMUT Capacitance Calculation Using a New Deflection Shape Function", *Journal of Sensors*, Vol. 2011, (2011).
4. Ganji, B. A. and Majlis, B. Y., "Fabrication and Characterization of a New MEMS Capacitive Microphone using Perforated Diaphragm", *International journal of Engineering*, Vol. 22, No. 2, (2009), 153-160.
5. Damghanian, M., Design and Fabrication of a MEMS Tactile Pressure Sensor Array for Fingerprint Imaging, in University of Kebangsaan, Bangi, Malaysia, (2009).
6. Timoshenko, S., Woinowsky-Krieger, S. and Woinowsky, S., "Theory of plates and shells, McGraw-hill New York, Vol. 2, (1959).
7. Di Giovanni, M., "Flat and corrugated diaphragm design handbook, New York, CRC, Marcel Dekker Inc, (1982).
8. Goodall, G. A., "Design of an Implantable Micro-scale Pressure Sensor for Managing Glaucoma", Michigan State University. Department of Mechanical Engineering, (2004).
9. Gu, Y., "Microfabrication of an intraocular pressure sensor, in Electrical and Computer Engineering", Michigan State University, (2006)
10. Senturia, S. D., "Microsystem design. 2001", Boston: Kluwer Academic. Harutyunyan, AR et al., Preferential growth of single-walled carbon nanotubes with metallic conductivity. Science, Vol. 326, No. 5949, (2009), 116-120.

Analytical Analysis of Capacitive Pressure Sensor with Clamped Diaphragm

RESEARCH NOTE

M. Shahiri Tabarestani^a, B. Azizollah Ganji^b

^a Department of Electrical Engineering, Islamic Azad University, Central Tehran Branch, Tehran, Iran

^b Electrical Engineering Department, Babol University of Technology, Babol, Iran

PAPER INFO

چکیده

Paper history:

Received 24 May 2012

Received in revised form 23 July 2012

Accepted 15 November 2012

Keywords:

Capacitance

Deflection

Capacitive Pressure Sensor

Diaphragm Deflection

در این مقاله آنالیز عددی سنسور فشار خازنی با دیافراگم کلمپ بررسی شده است. مشخصات مکانیکی و الکتریکی سنسور بر اساس تئوری "صفحات نازک با جابجایی کوچک" مورد تجزیه و تحلیل قرار گرفته و نتایج بدست آمده با نتایج حاصل از آنالیز المان محدود مقایسه شده است. همچنین مقادیر جابجایی مرکزی و ظرفیت خازنی تحت فشار خارجی یکنواخت محاسبه گردید. این بررسی ها نشان می دهد که نتایج حاصل از آنالیز المان محدود تطابق زیادی با نتایج حاصل از محاسبات تئوری دارد. لذا می توان نتیجه گرفت که مدل ریاضی معرفی شده دقت بالایی جهت معرفی رفتار سنسور فشار خواهد داشت

doi: 10.5829/idosi.ije.2013.26.03c.09