

# SID



سرویس های ویژه



سرویس ترجمه تخصصی



کارگاه های آموزشی



بلاگ مرکز اطلاعات علمی



عضویت در خبرنامه



فیلم های آموزشی

## کارگاه های آموزشی مرکز اطلاعات علمی جهاد دانشگاهی



مباحث پیشرفته یادگیری عمیق؛ شبکه های توجه گرافی (GAN)

مباحث پیشرفته یادگیری عمیق؛  
شبکه های توجه گرافی  
(Graph Attention Networks)



آموزش استفاده از وب آو ساینس

کارگاه آنلاین آموزش استفاده از  
وب آو ساینس



کارگاه آنلاین مقاله روزمره انگلیسی

# Behaviour of Plate Girders Subjected to Combined Bending and Shear Loading

F. Shahabian\* and T.M. Roberts<sup>1</sup>

Theoretical predictions regarding the ultimate resistance of slender plate girders to applied shear loading, based on existing theories and formulas, show close correlation with the test data presented. When a plate girder is subjected to a bending moment in addition to shear, the determination of the ultimate resistance becomes more complex. Herein, an interaction formula for the ultimate resistance of slender plate girders to combined bending and shear loading is proposed, which shows satisfactory correlation with the available theories and which is acceptable for practical purposes. The proposed interaction equation covers web panel aspect ratios,  $b_w/d_w$ , from 1 to 2 and slender ratios,  $d_w/t_w$ , from 150 to 300.

## INTRODUCTION

Slender steel plate girders are used in a variety of structural engineering applications, owing to their high strength-to-weight ratios and post-buckling reserves of strength. The web panels of plate girders may be subjected to shearing forces, bending moments and a combination of such loading. For example, end panels are subjected to shear loading and central panels are subjected to bending, while intermediate panels are subjected to combined bending and shear loading.

During the past four decades, numerous tests have been performed on slender plate girders to provide a better understanding of the modes of failure and the influence of geometric and material parameters on their ultimate resistance. Previous experimental and theoretical studies of slender web panels subjected to pure shear loading have been reviewed by Porter et al. [1], Evans [2] and Lee and Yoo [3]. Numerous tests have indicated that failure occurs in a typical shear sway mode, which is characterized by the formation of large inclined plastic shear buckles in the web and plastic hinges in the flanges. Rockey et al. [4] and Evans [2] have studied bending and the interaction between bending and shear loading. They proposed a procedure for quantifying the interaction between bending and shear, in terms of the moment at first

yield, and the yield shear strength of the web. It seems that the proposed procedure by Rockey et al. and Evans is more complex and is not suitable for practical purposes. Herein, an interaction formula for the ultimate resistance of slender plate girders to combined shear loading and bending is proposed, which shows satisfactory correlation with the available theories and which is acceptable for practical purposes.

## ULTIMATE SHEAR RESISTANCE

Theoretical predictions of the ultimate shear resistance of the test girders,  $V_u$ , were made, in accordance with the tension field theory developed by Porter et al. [1] and Evans [2]. For a web panel having width of  $b_w$ , depth of  $d_w$ , thickness of  $t_w$  and similar top and bottom flanges (Figure 1), the ultimate shear resistance,  $V_u$ , is given by:

$$V_u = \tau_{cr} d_w t_w + \sigma_t^y \sin^2 \theta (d_w \cot \theta - b_w) t_w + 4 d_w t_w \sin \theta \sqrt{(\sigma_{ow} M_p^* \sigma_t^y)}, \quad (1)$$

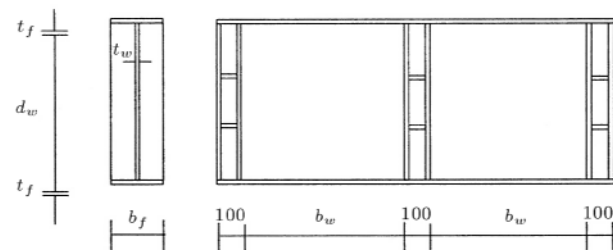


Figure 1. Details of test girders.

\*. Corresponding Author, School of Engineering, Ferdowsi University of Mashhad, P.O. Box 91775-1111, Mashhad, I.R. Iran.

1. School of Engineering, University of Wales Cardiff, P.O. Box 986, Cardiff CF2 3TB, UK.

**Table 1.** Details of test plate girders.

Girder	$b_w$ mm	$d_w$ mm	$t_w$ mm	$b_f$ mm	$t_f$ mm	$\sigma_{ow}$ N/mm <sup>2</sup>	$\sigma_{of}$ N/mm <sup>2</sup>
<b>PG1</b>	600	600	4.1	200	12.5	343	257
<b>PG2</b>	900	900	3.1	300	10.2	285	254
<b>PG3</b>	900	600	3.2	200	10.1	282	264
<b>PG4</b>	1000	500	1.9	200	9.9	250	293

where  $\tau_{cr}$  is the critical shear stress of an assumed, simply supported web plate given by:

$$\tau_{cr} = K \frac{\pi^2 E}{12(1 - \nu^2)} \left( \frac{t_w}{d_w} \right)^2, \quad (2)$$

where  $K$  is the buckling coefficient given by:

$$K = 5.34 + 4 \left( \frac{d_w}{b_w} \right)^2 \quad \text{when} \quad \frac{b_w}{d_w} \geq 1, \quad (3a)$$

$$K = 5.35 \left( \frac{d_w}{b_w} \right)^2 + 4 \quad \text{when} \quad \frac{b_w}{d_w} \leq 1. \quad (3b)$$

$\sigma_t^y$  is the web tension field membrane stress defined by the following equation:

$$\frac{\sigma_t^y}{\sigma_{ow}} = \sqrt{\left( 1 - \left( \frac{\tau_{cr}}{\tau_{ow}} \right)^2 \left( 1 - \frac{3}{4} \sin^2 2\theta \right) \right)} \frac{\sqrt{3} \tau_{cr}}{2 \tau_{ow}} \sin 2\theta, \quad (4)$$

where  $\tau_{ow}$  is the shear yield stress of the web given by:

$$\tau_{ow} = \frac{\sigma_{ow}}{\sqrt{3}}. \quad (5)$$

$\theta$  is the inclination of the web tension field, assumed, approximately, to be two thirds of the inclination of the web panel diagonal, i.e.:

$$\theta = \frac{2}{3} \tan^{-1} \left( \frac{d_w}{b_w} \right). \quad (6)$$

where  $\sigma_{ow}$  is the yield stress of the web and  $M_p^*$  is a non-dimensional flange strength parameter defined as follows:

$$M_p^* = \frac{M_{pf}}{d_w^2 t_w \sigma_{ow}}. \quad (7)$$

$M_{pf}$  is the fully plastic moment of the flange, which for a rectangular flange having width of  $b_f$ , thickness of  $t_f$  and yield stress of  $\sigma_{of}$  is given by:

$$M_{pf} = 0.25 b_f t_f^2 \sigma_{of}. \quad (8)$$

A series of tests has been conducted on short span, welded plate girders, illustrated in Figure 1 [5]. The dimensions of the test girders, denoted PG1 to PG4, and material yield strengths are presented in Table 1. All the girders were simply supported and loaded in an Avery hydraulic testing machine under deflection control.

Theoretical ultimate resistances of the test girders to shear loading,  $V_u$ , which are determined in accordance with Equation 1, are compared with the maximum experimental results,  $V_{ex}$ , shown in Table 2. As can be seen, there is close correlation between  $V_u$  and  $V_{ex}$ , so any one of them can be used in the next calculations.

## ULTIMATE BENDING RESISTANCE

Based on an experimental study, Cooper [4] proposed the following empirical equation for determining the ultimate bending resistance of slender plate girder web panels,  $M_u$ :

$$\frac{M_u}{M_y} = 1 - 0.0005 \frac{A_w}{A_f} \left[ \frac{d_w}{t_w} - 5.7 \sqrt{\frac{E}{\sigma_{of}}} \right], \quad (9)$$

where  $M_y$  is the moment at first yield of the extreme fibres of the compression flange,  $A_w$  and  $A_f$  are the cross-section areas of the web and compression flange, respectively, and  $E$  is Young's modulus.

## COMBINED BENDING AND SHEAR LOADING

When a plate girder is subjected to a bending moment in addition to shear, the determination of the ultimate resistance becomes more complex. Rockey et al. [4] and Evans [2] have studied the interaction between

**Table 2.** Comparison of test results with theoretical predictions.

Test Girder	$V_{ex}$ kN	$V_u$ kN
<b>PG1</b>	373	386
<b>PG2</b>	271	268
<b>PG3</b>	202	182
<b>PG4</b>	87	70

bending and shear loading. The interaction between these two forms of loading was presented by the type of diagram shown in Figure 2. The portion of the curve between points  $S$  and  $C$  represents the region within which the girder will fail by the development of a shear mechanism. The vertical ordinate of point  $S$  represents the pure shear resistance given by Equation 1. This shear resistance is reduced gradually by the presence of an increasing bending moment.

Beyond point  $C$ , where the applied bending moment is high, failure occurs in the flanges, either by the yielding of the flange or by the inward or lateral buckling of the compression flange. The following empirical relationship has been developed for locating point  $C$  [1].

$$\frac{V_c}{V_{yw}} = \frac{\tau_{cr}}{\tau_{ow}} + \left( \frac{\sigma_t^y}{\sigma_{ow}} \right) \sin \left( \frac{4\theta_d}{3} \right)$$

$$\left[ 0.554 + \frac{36.8M_{pf}}{M_F} \right] \left[ 2 \left( \frac{b_w}{d_w} \right)^{1/8} \right], \quad (10)$$


$$V_{yw} = \tau_{ow} d_w t_w, \quad (11)$$

where  $\theta_d$  is the inclination of the web panel diagonal and  $M_F$  is the plastic moment resistance of the flanges about the neutral axis of the girder, given by:

$$M_F = b_f t_f \sigma_{of} (d_w + t_f). \quad (12)$$

Equation 10 defines the vertical ordinate of point  $C$  and, in conjunction with the horizontal coordinate value,  $M_F$ , enables the position of point  $C$  to be located.

If a plate girder is subjected to a bending moment in excess of  $M_F$ , it will fail in a bending mode. If sufficient lateral support is provided to ensure that lateral

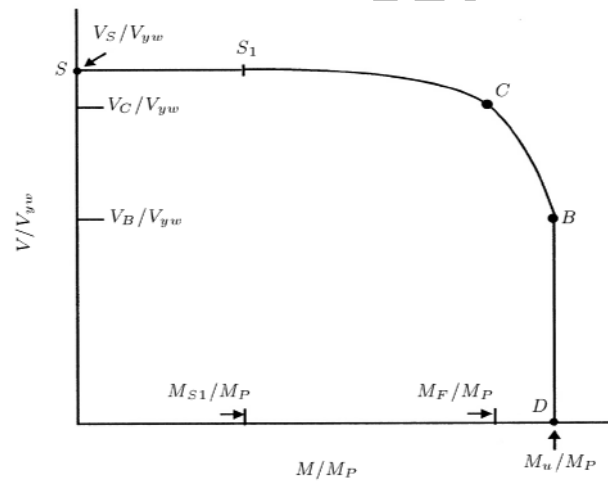

**Figure 2.** Interaction diagram for shear and bending of plate girders.

buckling does not occur, a thin walled plate girder will fail by an inward collapse of the compression flange. This will occur when the applied bending moment,  $M_u$ , is close to that moment,  $M_y$ , which produces a yielding of the extreme fibres of the compression flange.

Equation 9 defines the position of point  $D$  on the horizontal axis of the interaction diagram.  $M_y$  is the moment required to produce yield in the extreme fibres of the flange, while the corresponding stresses in the web are below yield. Consequently, the web can resist a certain amount of coexistent shear loading. This shear is defined by the ordinate of point  $B$ , lying vertically above point  $D$ . The ordinate,  $V_B$ , is given by [1]:

$$\frac{V_B}{V_C} = \sqrt{\left( \frac{M_p - M_u}{M_{pw}} \right)}, \quad (13)$$

where  $M_p$  is the fully plastic moment resistance of the complete cross-section and  $M_{pw}$  is the fully plastic moment of the web given by:


$$M_{pw} = 0.25 t_w d_w^2 \sigma_{ow}. \quad (14)$$

Equation 13 defines the position of the final point on the interaction diagram. The portion,  $CB$ , of the curve can be assumed to be either parabolic or linear. In this way, the complete diagram can be drawn.

## PROPOSED INTERACTION EQUATION

A summary of the calculations required to draw the interaction curves for test girders PG1 to PG4 is represented in Table 3 and the completed diagrams are shown in Figures 3 to 6.


The method proposed by Rockey et al. [4] and Evans [2] for quantifying the interaction between bending and shear involves sufficient complexity to

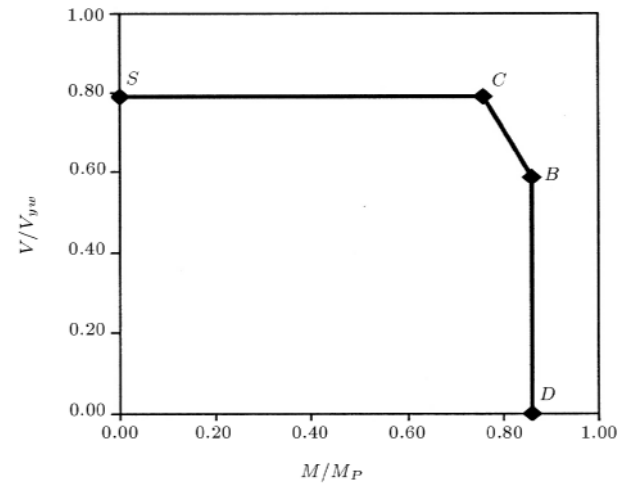


**Figure 3.** Interaction diagram between shear and bending for girder PG1.

**Table 3.** Calculations to draw interaction curve between shear and bending.

Girder	$V_{yw}$ kN	$\frac{V_S}{V_{yw}}$	$\frac{V_C}{V_{yw}}$	$\frac{V_B}{V_{yw}}$	$M_P$ kN.m	$\frac{M_F}{M_P}$	$\frac{M_u}{M_P}$
PG1	487	0.79	0.79	0.59	5200	0.76	0.86
PG2	460	0.58	0.58	0.42	8863	0.80	0.85
PG3	313	0.58	0.58	0.45	4065	0.80	0.88
PG4	137	0.50	0.50	0.42	3255	0.91	0.93

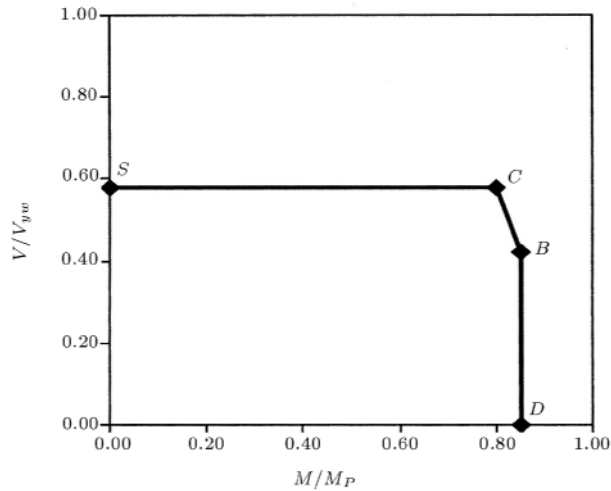

**Figure 4.** Interaction diagram between shear and bending for girder PG2.

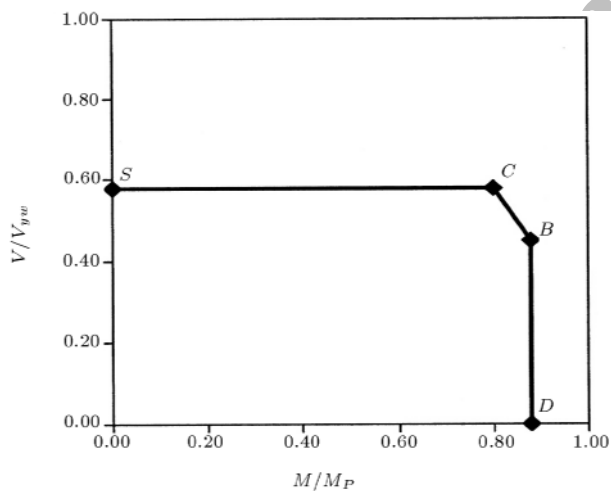


**Figure 5.** Interaction diagram between shear and bending for girder PG3.

discourage use of the method. Much of the complexity is associated with the need to determine the ordinates of points to plot the interaction diagram.


To deduce a formula for the interaction between shear loading and bending, the results presented in Table 3 are normalised, with respect to  $V_u$  (or  $V_{ex}$ ) and  $M_u$ , instead of  $V_{yw}$  and  $M_p$  and represented in Table 4 and Figure 7. As can be seen, a conservative interaction formula for combined shear and bending is,

**Table 4.** Calculations to draw proposed interaction curve between shear and bending.

Girder	$\frac{V_C}{V_u}$	$\frac{M_F}{M_u}$
PG1	1.00	0.88
PG2	1.00	0.93
PG3	1.00	0.91
PG4	0.96	0.97

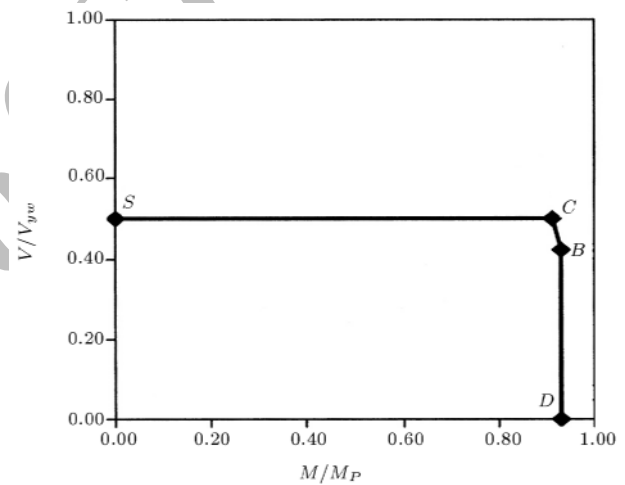

**Figure 6.** Interaction diagram between shear and bending for girder PG4.

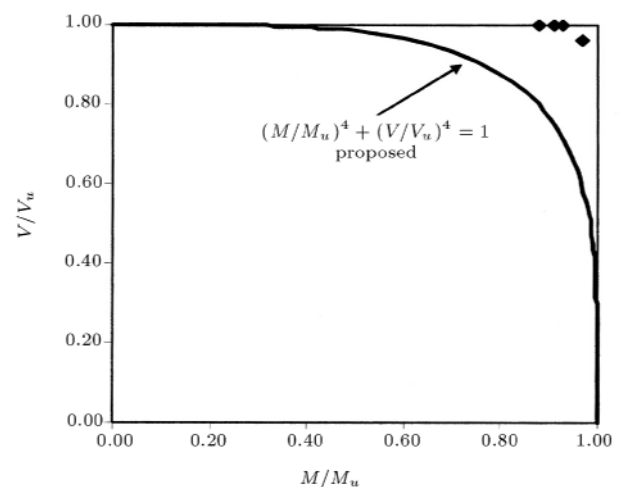

**Figure 7.** Proposed interaction diagram between bending and shear.

as follows:

$$\left(\frac{V}{V_u}\right)^{4.0} + \left(\frac{M}{M_u}\right)^{4.0} = 1, \quad (15)$$

where  $V$  is the shear resistance of the plate girder in the presence of an applied bending moment,  $M$ .  $V_u$  and  $M_u$  are defined by Equations 1 and 9, respectively.

## DISCUSSION AND CONCLUSIONS

A series of tests have been conducted on short span, welded plate girders to investigate their ultimate resistance to shear loading. Failure of the test girders occurred in a typical shear failure mode, characterised by the formation of large inclined plastic shear buckles in the web and plastic hinges in the flanges. Theoretical predictions of the ultimate resistance of slender plate girders to applied shear loading, based on existing theories and formulas, show close correlation with the test data presented herein, so, any of them may be used in the calculations.

If a plate girder is subjected to a bending moment, it fails in a bending mode. If sufficient lateral support is provided to ensure that lateral buckling does not occur, a thin walled plate girder fails by inward collapse of the compression flange. This will occur when the applied bending moment is close to the moment that produces yielding of the extreme fibres of the compression flange.

When a plate girder is subjected to a bending moment in addition to shear, determination of the ultimate resistance becomes more complex. In this paper, an interaction formula for the ultimate resistance of slender plate girders to combined loading is proposed, which shows satisfactory correlation with the available theories data and which is suitable for practical purposes. The proposed interaction equation covers web panel aspect ratios,  $b_w/d_w$ , from 1 to 2 and slender ratios,  $d_w/t_w$ , from 150 to 300.

## NOMENCLATURE

$A_f$	flange cross section area
$A_w$	web cross section area
$b_f$	width of flange
$b_w$	clear width of web between stiffeners
$d_w$	depth of web
$E$	Young's modulus
$K$	buckling coefficient

$M$	moment resistance in the presence of shear
$M_F$	plastic moment resistance provided by the flanges
$M_p$	fully plastic moment resistance of the complete cross-section
$M_{pf}$	plastic moment resistance of the flanges
$M_{pw}$	plastic moment of the web
$M_u$	ultimate bending resistance
$M_y$	moment, which produces yielding of the extreme fibres of the compression flange
$t_f$	thickness of flange
$t_w$	thickness of web
$V$	shear resistance in the presence of bending
$V_{ex}$	experimental ultimate shear resistance
$V_u$	ultimate shear resistance
$V_{yw}$	shear yield resistance of the web
$\theta$	inclination of web tension field
$\theta_d$	inclination of web panel diagonal
$\sigma_{of}$	yield stress of flange
$\sigma_{ow}$	yield stress of web
$\sigma_t^y$	web tension field membrane stress
$\tau_{cr}$	critical shear stress of web
$\tau_{ow}$	shear yield stress of web

## REFERENCES

- Porter, D.M., Rockey, K.C. and Evans, H.R. "The collapse behaviour of plate girders loaded in shear", *The Structural Engineer*, **53**(8), pp 313-325 (1975).
- Evans, H.R. "Longitudinally and transversely reinforced plate girders", *Plated Structures, Stability and Strength*, R. Narayanan, Ed., Elsevier, Applied Science Publishers, London, UK (1983).
- Lee, S.C. and Yoo, C.H. "Strength of plate girder web panels under pure shear", *Journal of the Structural Engineering Division of the ASCE*, **124**(2), pp 184-194 (1998).
- Rockey, K.C., Evans, H.R. and Porter, D.M. "A design method for predicting the collapse behaviour of plate girders", *Proc. Instn. Civ. Engrs., Part 2*, **65**, pp 85-112 (1978).
- Shahabian, F. and Roberts, T.M. "Combined shear and patch loading of plate girders", *Journal of Structural Engineering, ASCE*, **126**(3), pp 316- 321(2000).

# SID



سرویس های  
ویژه



سرویس ترجمه  
تخصصی



کارگاه های  
آموزشی



بلاگ  
مرکز اطلاعات علمی



عضویت در  
خبرنامه



فیلم های  
آموزشی

## کارگاه های آموزشی مرکز اطلاعات علمی جهاد دانشگاهی



مباحث پیشرفته یادگیری عمیق؛  
شبکه های توجه گرافی  
(Graph Attention Networks)



کارگاه آنلاین آموزش استفاده از  
وب آوساینس



کارگاه آنلاین مقاله روزمره انگلیسی